




Features

- Visible Class 1 laser for diffuse sensing
- Narrow effective beam provides small-object detection and precise position control
- Crosstalk rejection algorithm protects against optical disturbance from adjacent sensors
- Excellent optical performance throughout sensing range, even close up
- 10 to 30V dc operation, with complementary (SPDT) NPN or PNP outputs, depending on model
- Bright LED operating status indicators are visible from 360°
- Compact, rugged sealed housing, protected circuitry
- Mounting versatility – popular 18 mm threaded barrel or side-mount
- Choose 2 m (6.5') or 9 m (30') cable or one of four QD options



Models

Model	Sensing Beam and Range	Spot Size at Focus	Cable*	Output	Excess Gain	Beam Pattern
					Performance based on 90% reflectance white test card	
QS18VN6LD	650 nm Visible Red, Class 1 Laser 300 mm (12")	Approx. 1 mm at 300 mm (0.039" at 12")	4-wire, 2 m (6.5') integral cable	NPN		
QS18VP6LD				PNP		

*Only standard 2m (6.5') cable models are listed. For 9 m (30') cable, add suffix "W30" to the model number (e.g., QS18VN6LD W30).

QD models:

- For 4-pin integral Euro-style QD, add suffix "Q8" (e.g., QS18VN6LDQ8).
 - For 4-pin integral Pico-style QD, add suffix "Q7" (e.g., QS18VN6LDQ7).
 - For 4-pin Euro-style 150 mm (6") pigtail QD, add suffix "Q5" (e.g., QS18VN6LDQ5).
 - For 4-pin Pico-style 150 mm (6") pigtail QD, add suffix "Q" (e.g., QS18VN6LDQ).
- A model with a QD connector requires a mating cordset (see page 3).

⚠ WARNING . . . Not To Be Used for Personnel Protection


Never use these products as sensing devices for personnel protection. Doing so could lead to serious injury or death.

These sensors do NOT include the self-checking redundant circuitry necessary to allow their use in personnel safety applications. A sensor failure or malfunction can cause either an energized or de-energized sensor output condition. Consult your current Banner Safety Products catalog for safety products which meet OSHA, ANSI and IEC standards for personnel protection.



WORLD BEAM® QS18LD Series

Specifications

Supply Voltage	10 to 30V dc (10% maximum ripple) at less than 15 mA, exclusive of load; Protected against reverse polarity and transient voltages		
Sensing Beam (Laser Characteristics)	Wavelength: 650 nm visible red Class 1 laser Pulse Width: 7 microseconds Rep Rate: 130 microseconds Average Output Power: 0.065 milliwatts		
Output Configuration	Solid-state complementary (SPDT); NPN or PNP (current sinking or sourcing), depending on model; Rating: 100 mA maximum each output at 25°C Off-state leakage current: NPN: less than 200 µA @ 30V dc PNP: less than 10 µA @ 30V dc ON-state saturation voltage: NPN: less than 1.6V @ 100 mA PNP: less than 2.0V @ 100 mA Protected against false pulse on power-up and continuous overload or short circuit of outputs		
Output Response	700 microseconds ON/OFF NOTE: 200 ms max. delay on power-up; outputs do not conduct during this time		
Repeatability	130 microseconds		
Hysteresis	15% of range typical		
Adjustments	Single-turn sensitivity (Gain) adjustment potentiometer		
Indicators	2 LED indicators on sensor top: Green ON steady: Power ON Yellow ON steady: Light sensed Green flashing: Output overloaded Yellow flashing: Marginal excess gain (1.0 to 1.5x excess gain)		
Construction	ABS housing, rated IEC IP67; NEMA 6; Acrylic lens cover 3 mm mounting hardware included		
Connections	2 m (6.5') 4-wire PVC cable	4-pin Pico-style QD	4-pin Euro-style QD
	9 m (30') 4-wire PVC cable	4-pin Pico-style 150 mm (6") pigtail QD	4-pin Euro-style 150 mm (6") pigtail QD
Operating Conditions	Temperature: -10° to +50° C (+14° to +122° F) Relative Humidity: 90% @ 50° C (non-condensing)		
Laser Classification	Class 1 laser product; complies with IEC 60825-1:2001 and 21 CFR 1040.10, except for deviations pursuant to Laser Notice 50, dated 7-26-01		
Certifications			

Description of Laser Class

Class 1

Lasers that are safe under reasonably foreseeable conditions of operation, including the use of optical instruments for intrabeam viewing.

Reference IEC 60825-1:2001, section 8.2.

Class 1 Laser Characteristics

(see specifications above)

For Safe Laser Use:

- Do not permit a person to stare at the laser from within the beam.
- Do not point the laser at a person's eye at close range.
- Locate open laser beam paths either above or below eye level, where practical.




CAUTION . . . Do Not Disassemble for Repair

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure. **Do NOT attempt to disassemble this sensor for repair.** A defective unit must be returned to the manufacturer.


Dimensions and Features

Cabled Models

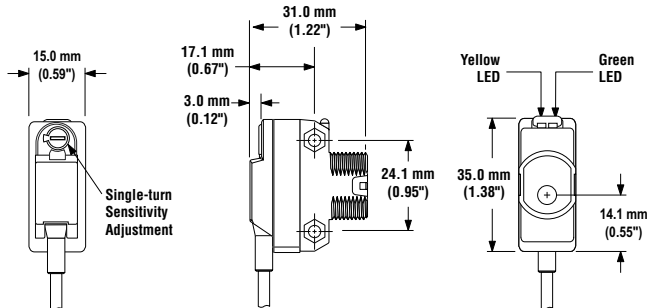


QD Models

Model Suffix Q




Model Suffix Q5



Mounting Hardware (included)

Packing List:


Sensor
M18 x 1 jam nut
M3 hardware packet




M3 Hardware Packet Contents:

2 – M3 x 0.5 x 20 mm SS Screw
2 – M3 x 0.5 SS Hex Nut
2 – M3 SS Washer

Model Suffix Q7




Model Suffix Q8




Hookups


NPN (Sinking) Outputs



PNP (Sourcing) Outputs




4-Pin Pico-Style Pin-out (Cable Connector Shown)



1 = Brown
2 = White
3 = Blue
4 = Black

4-Pin Euro-Style Pin-out (Cable Connector Shown)



1 = Brown
2 = White
3 = Blue
4 = Black

Euro-Style Quick-Disconnect Cordsets










Style	Model	Length	Dimensions
4-Pin Straight	MQDC-406	2 m (6.5')	
	MQDC-415	5 m (15')	
	MQDC-430	9 m (30')	
4-Pin Right-angle	MQDC-406RA	2 m (6.5')	
	MQDC-415RA	5 m (15')	
	MQDC-430RA	9 m (30')	

Pico-Style Quick-Disconnect Cordsets

Style	Model	Length	Dimensions
4-Pin Straight	PKG4-2	2 m (6.5')	
4-Pin Right-angle	PKW4Z-2	2 m (6.5')	

WORLD BEAM® QS18LD Series

Mounting Brackets

SMB18A	<ul style="list-style-type: none"> • 12-gauge, stainless steel • Right-angle barrel-mount bracket 		SMBQS18RA	<ul style="list-style-type: none"> • 14-gauge, 304 stainless steel • Right-angle side-mount bracket 	
SMB312S	<ul style="list-style-type: none"> • Stainless steel • 2-axis, side-mounting bracket 		SMB18FA	<ul style="list-style-type: none"> • 14-gauge, 304 stainless steel • 18 mm swivel bracket with tilt and pan movement for precision adjustment 	
SMB46A	<ul style="list-style-type: none"> • 2-piece, 12-gauge, stainless steel bracket assembly with precision sensor alignment adjustment • Includes 2 mm hex key 		SMBQS18Y	<ul style="list-style-type: none"> • Die-cast bracket for mounting into 18 mm holes • Metal hex nut and lock washer included • Cabled sensors tilt $\pm 8^\circ$ 	
SMB18SF	<ul style="list-style-type: none"> • 18 mm swivel bracket • Black thermoplastic polyester • Includes stainless steel swivel locking hardware 				
SMB3018SC	<ul style="list-style-type: none"> • 18 mm swivel side-mount bracket • Black reinforced thermoplastic polyester • Includes stainless steel swivel locking hardware 		SMBQS18A	<ul style="list-style-type: none"> • Nickel-plated die-cast zinc • Wrap-around bracket 	

For bracket dimensions, visit www.bannerengineering.com.



P/N 118899 rev. C

WARRANTY: Banner Engineering Corp. warrants its products to be free from defects for one year. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture found to be defective at the time it is returned to the factory during the warranty period. This warranty does not cover damage or liability for the improper application of Banner products. This warranty is in lieu of any other warranty either expressed or implied.